

SPECIFICATION


DIGITAL CAMERA FinePix4700 Zoom

CCD sensor	1/1.7-inch Super CCD, 2.4 million pixels in an interwoven pattern			
Image file size	4.3 million pixels (2,400 × 1,800)/1,280 × 960/ 640 × 480 pixels, 24-bit color			
File format	JPEG (Exif) with 3 compression levels			
Storage media	SmartMedia™ Cards (3.3V, 2–64MB)			
Number of images (at 2400 × 1800 mode)	Mode	MG-16S	MG-32S	MG-64S
	Fine	9	18	47
	Normal	19	38	94
	Basic	47	77	189
Lens	Super EBC Fujinon zoom lens, F2.8/F7.0 (wide-angle) – F4.5/F10.8 (telephoto)			
Lens focal length	Equivalent to 36–108 mm on a 35 mm camera			
Focus	Automatic / Manual			
Focus distance	Normal: 80 cm / 2.6 ft. to infinity Macro: 20 cm / 7.9 in. to 80 cm / 2.6 ft.			
Viewfinder	Real-image optical viewfinder			
Exposure control	64 zone TTL metering, Program AE with exposure compensation			
Metering	Average, Spot, Multi			
Sensitivity	Equivalent to ISO 200/400/800			
Shutter speed	Automatic (3 to 1/2,000 sec.)			
White balance	Automatic / Manual (6 position)			
Flash	Auto flash using flash control sensor 5 modes (Auto, Red-Eye Reduction, Forced, Suppressed, Slow synchro) Effective range: 4 m / 13.1 ft. (Max)			
LCD monitor	2-inch low-temperature polysilicon TFT (130,000 pixels)			
Interface	USB, Video/Audio			
Power source	2AA batteries, AC power adapter (optional) (Alkaline batteries are not recommended.)			
Dimensions	78 (W) × 97.5 (H) × 32.9 (D) mm/ 3.1 (W) × 3.8 (H) × 1.3 (D) in.			
Weight	255 g/9.0 oz. (without battery)			


Other functions	Self-Timer Digital 3.75X Telephoto (640 × 480 mode), 1.88X (1,280 × 960 mode) Shooting mode: Auto, Portrait, Scene, Night Scenery, Manual, Continuous Shooting, Motion Picture Recording Continuous shooting: 0.2 sec/frame, up to 3 frames Motion picture recording: 320 × 240 pixels, 10 frames/sec, up to 80 sec, AVI format Auto exposure bracketing mode: ±1/3EV, ±2/3EV, ±1EV Playback: Single Frame (with 15X Playback Zoom), 9 Multi-Frame, Automatic Playback Resize: 2,400 × 1,800 → 1,280 × 960, 2,400 × 1,800 → 640 × 480 Protect, DPOF
Accessories included	16 MB SmartMedia™ card, hand strap, Ni-MH battery charger, 2 Ni-MH batteries, USB cable, AV cable, CD-ROM (USB driver, Exif Viewer, DP Editor, Apple™ QuickTime™ 4.0, Adobe® PhotoDeluxe® Home Edition 3.0)

Specifications are subject to change without notice.

FUNCTIONS

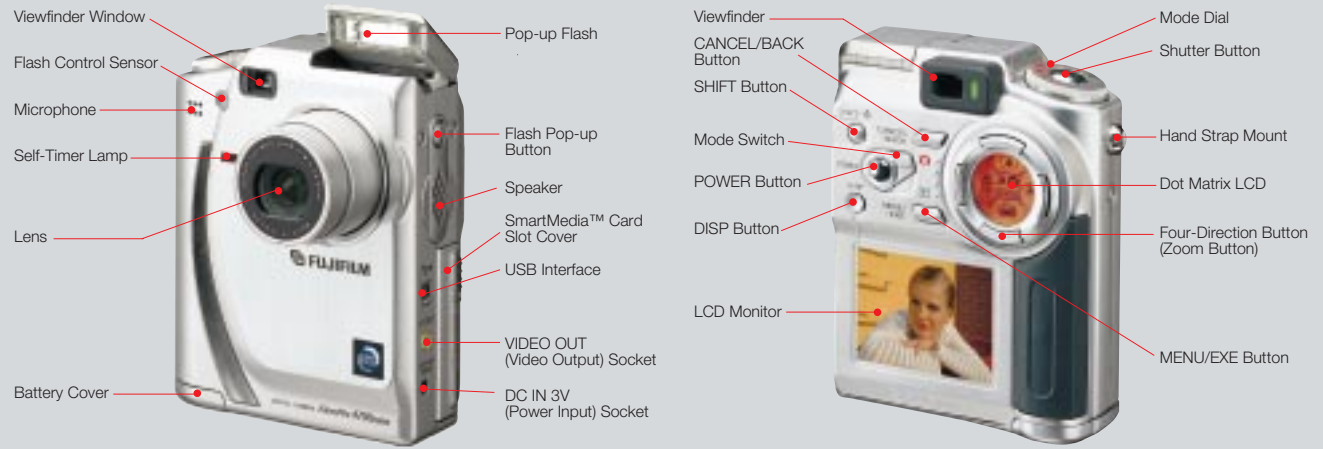

SYSTEM CONFIGURATION

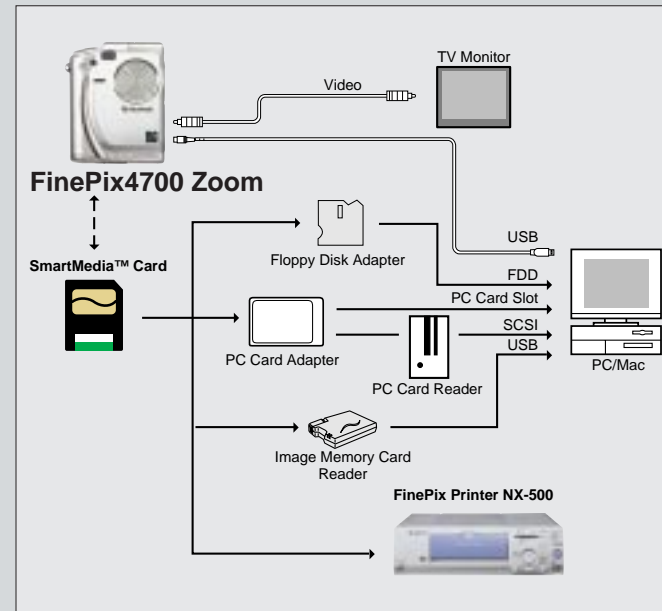

OPTIONAL ACCESSORIES

	SmartMedia™ Cards MG-4S MG-8S MG-16S MG-32S MG-64S		AC Power Adapter AC-3V
	Floppy Disk Adapter FD-A2		Battery Charger with Battery BK-NH (charged in approx. 2 hours, AC 220V only)
	PC Card Adapter PC-AD3		Rechargeable Battery 2HR-3UF (AA-type × 2, Ni-MH)
	Image Memory Card Reader SM-R1/R2		Soft Case SC-FX1

All trademarks are the property of their respective holders.

For more information on Fujifilm digital products, please visit our Website: <http://home.fujifilm.com>



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME, MINATO-KU, TOKYO 106-8620, JAPAN

Ref. No. EB-009ER (SK-00-05-DT-MW) Printed in Japan © 2000 Fuji Photo Film Co., Ltd.